


## SYMPOR Tacker panel roll EPS-T 650 ALU-PET

Heat and sound insulation of expanded Polystyrene EPS-T 650, laminated with ALU PET film, tear resistant, with printed on pattern 50 x 50 mm installation grid. Self adhesive strip on one side of the film allows quick and precise connecting of the panel rolls.

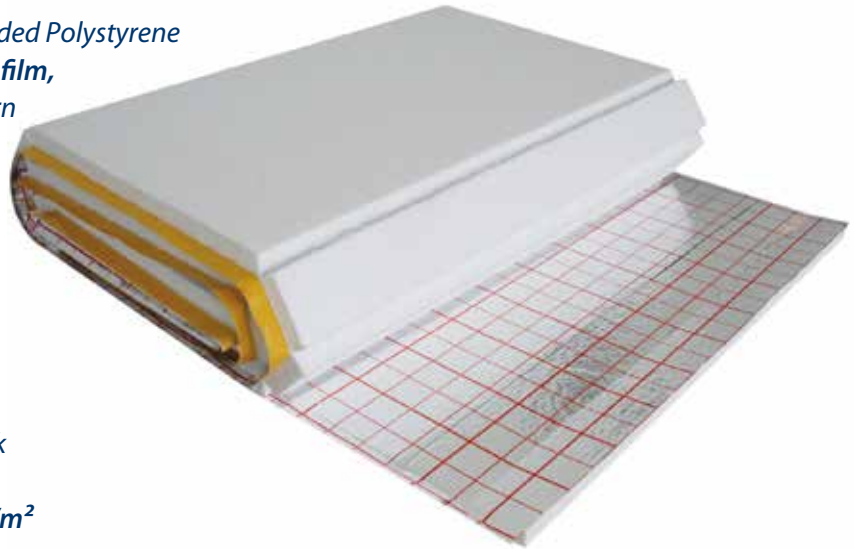

**Roll format : 10000 x 1000 mm**

Packaging: PE bag

Pipe installation by Tacker pipe clip, or self adhesive U profile clamp track

**Suitable for a total load of 650 kg/m<sup>2</sup>**

### SYMPOR Tacker panel roll EPS-T 650 ALU-PET

Item No.	Thickness mm	Length mm	Unit m <sup>2</sup> / Roll	Max load KN/m <sup>2</sup>	R m <sup>2</sup> K/W	S' MN/m <sup>3</sup>	VM dB
001TAKR-T650-20-2	20-2	10000	10	6,5	0,5	30	27
001TAKR-T650-25-2	25-2	10000	10	6,5	0,63	30	27
001TAKR-T650-30-2	30-2	10000	10	6,5	0,75	20	29

R= Thermal resistance      S' = Dynamic rigidity      VM = Improvement of sound impact

### Technical data

	Unit	Value
Thermal heat conductivity group $\lambda_D$	W/mK	0,04
Flexibility resistance	kPa	≥ 50
Short term heat stability	° C	95
Long term heat stability	° C	75-80
Fire behaviour (EN 13501-1)		Euroclasse E
Classification EN 13163		EPS-T 650